


TECH NOTE X

ISSUE DATE: 14-Dec-04
EXEDY REF: X
REVISED: 15-Aug-05

DISASSEMBLY AND INSTALLATION PROCEDURE

NEW TECHNOLOGY DESIGN CLUTCH

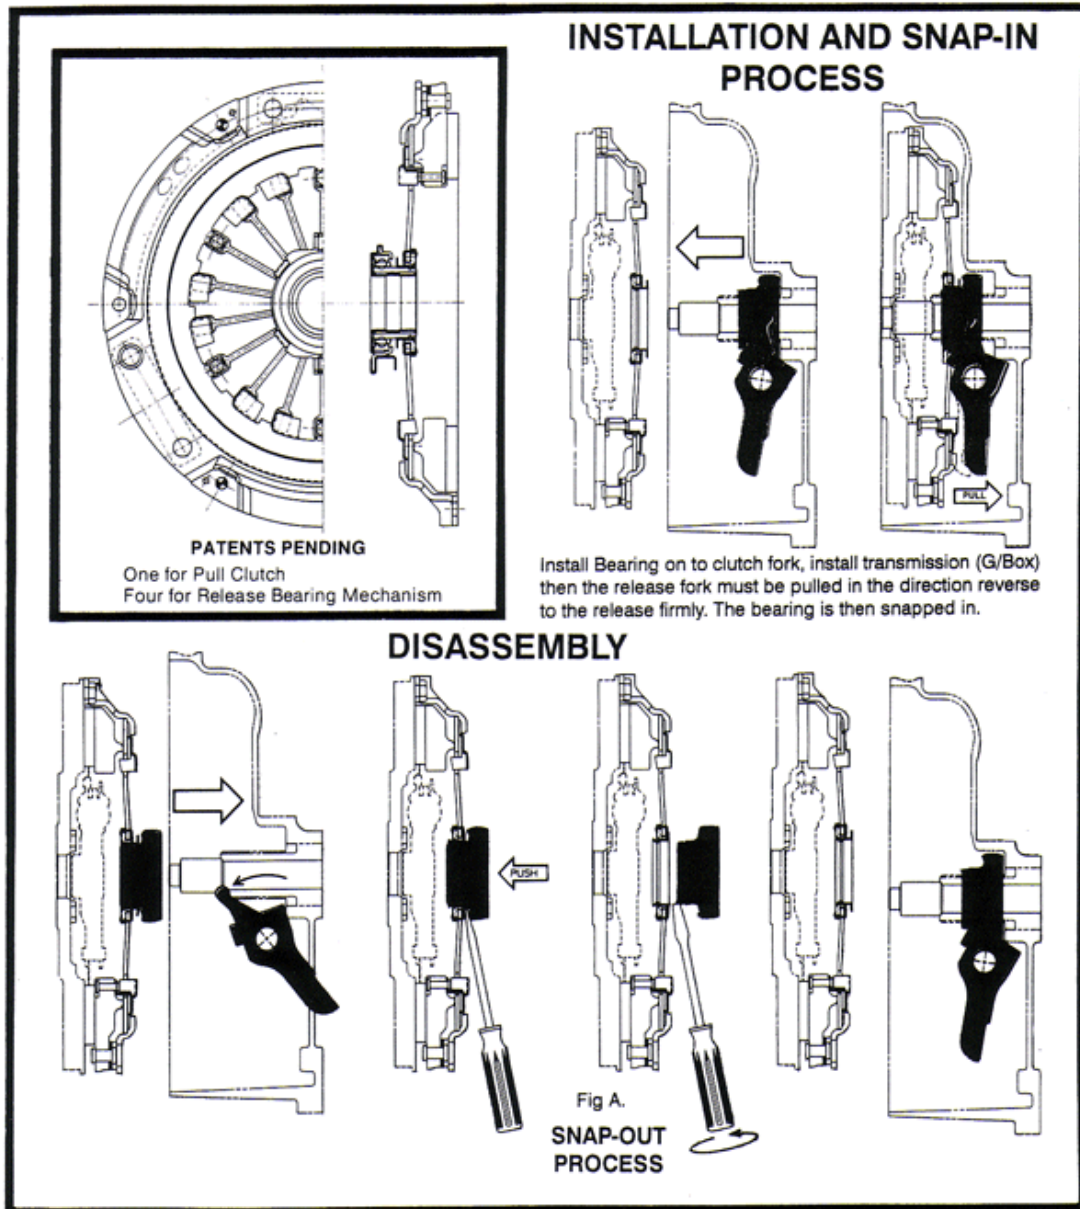

Move bellhousing back approximately 30 to 40mm, insert screwdriver and twist as figure A. Bearing will then snap out from clip mechanism.

For Subaru and Hyundai models with pull type design clutch.
Do not use the above method.

Refer Tech Notes O & W Respectively

www.exedy.com.au

EXEDY
EXEDY AUSTRALIA PTY LTD